


# MONUMENT RECORD

Corner ID: **Wash\_A03**

**Quarter Corner**

Section 6- T10N-R01W, 2nd P.M.



Washington Township, Monroe County, Indiana



**MONUMENT:** Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)

(#520) 5/8" rebar (24" long) with 2" diameter aluminum cap inscribed MONROE COUNTY SURVEYORS OFFICE SHEPPARD PLS #20100021, set, with top flush with ground in a cow pasture, 4' West of a north-south stretch wire fence line.

## MONUMENT LOCATION SKETCH:

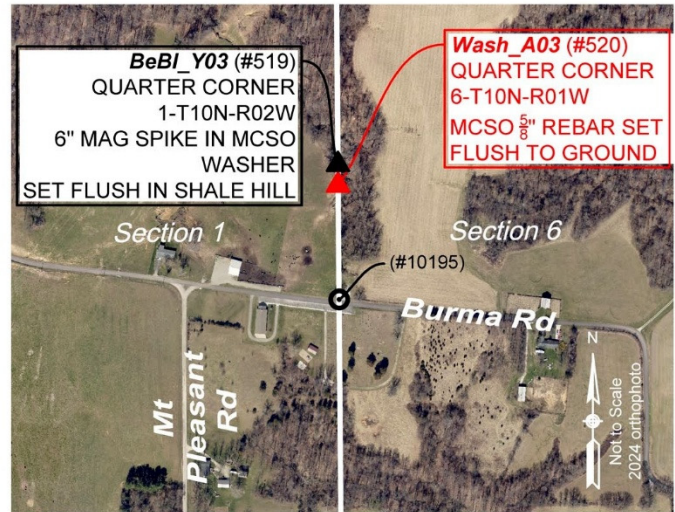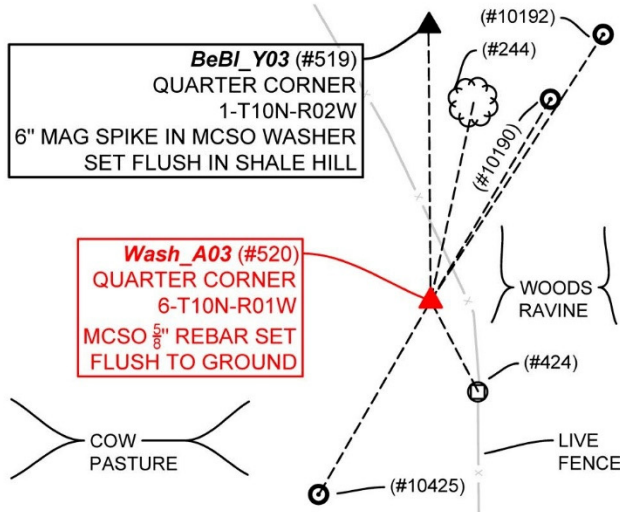

**WITNESS MONUMENT TIES:** Describe at least three new BT's (Bearing Trees) and/or witness objects established or work done to preserve existing evidence. BT diameters are noted as dbh (diameter at breast height) and are measured approximately 4.5' above ground. Bearings and Distances are measured from the monument to the center of the BT. Bearings and Distances to witness ties were measured with a Sokkia Set 510 Total Station.

ID	Bearing	Distance	Description
(#424)	S27° 40'E	31.8'	Fiberglass I beam style post at fence angle break
(#244)	N12° 13'E	63.2'	14" diameter Sugar Maple tree at toe of slope of steep ravine
<b>MONUMENT ACCESSORIES</b>			
Other survey grade monuments that were located in the vicinity and their relation to the monument. Witnesses noted as a Rebar Lite are a 5/8" diameter by 16" polycarbonate rod with a 1-1/2" mag nail in top and yellow plastic cap stamped "MONROE COUNTY WITNESS POINT" set 0.1 foot below grade unless otherwise noted.			
Geodetic coordinates in this table are provided in the format Northing, Easting			
(#519)	N00° 28' 55"W	87.40'	N:1487702.3642' E:3096696.9715' 6" Mag Spike in washer set in shale hill at BeBI_Y03
(#10190)	N30° 41' 08"E	73.18'	N:1487677.9010' E:3096735.0524' Rebar Lite
(#10192)	N32° 57' 22"E	99.04'	N:1487698.0735' E:3096751.5863' Rebar Lite
(#10195)	S00° 32' 42"E	475.65'	N:1487139.3355' E:3096702.2304' 2" Outside diameter Iron pipe found 0.2' Below Ground, just North of North edge of Pavement of Burma Road.
(#10425)	S30° 04' 20"W	70.14'	N:1487554.2701' E:1487554.2701' Rebar Lite



**OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph**

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 4


# MONUMENT RECORD

Corner ID: **Wash\_A03**

**Quarter Corner**

Section 6- T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana



**PHOTO IDENTIFIED:** Photo Date: 09/23/2025



Photo Orientation & Description: Looking east at Wash\_A03



Photo Orientation & Description: Looking south at Wash\_A03, Witness (#424) and surveyor.

**EXISTING SURVEY HISTORY** Include as much detail and history of the corner as known at the time of perpetuation

## ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: 1815 By: William Harris Deputy Surveyor

Where filed or recorded: Monroe County Original Notes page 109.

Original monument: Post

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Beech	9"	S72°E	26 links
Beech	9"	N79°W	50 links

Notes: Though this Post was set in the original establishment of the Range line, by William Harris in 1815, to monument the East quarter corner of Section 1 Township 10 North Range 2 West, it was later adopted (per the original plat) as the West Quarter corner of Section 6 Township 10 North Range 1 West and not accepted as the East quarter corner of Section 1 Township 10 North Range 2 West (per the original plat), after surveyor Thos Brown set a new Southeast corner post of said Section 1 in a different location than the one set by William Harris in 1815.

## SUBSEQUENT CORNER RESTORATION:

None found

**OTHER SURVEY HISTORY:** Include details such as surveyor name, date, recording info, monument description, etc.

DocumentDate	SurveyID	Surveyor	Description	InstrumentNo
8/27/2020	RSID004116	Deckard, Eric Lee	Larry & Dawana Page boundary survey analysis.	2020018655.IN

**ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE:** Include, search area or areas, search procedure, etc.

Date of Field work/Search: 06/10/2025, 07/18/2025 & 09/23/2025 By: MES/JMG/EGC Monument Found: Capped Rebar set BTs or Reference Objects Found: No, but references established Project # 25-003 Field Book: 58 pages 53 & 70, Also Field Book 59 page 23.

Notes:



**OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph**

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 2 of 4




## MONUMENT RECORD

Corner ID: **Wash\_A03**

### Quarter Corner

Section 6- T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana



**OTHER EVIDENCE:** *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

The rebar is in a Cow pasture, 4' West of a relatively new north-south stretch wire fence line. There is older fence running through an overgrown area where a tornado appears to have went through to the East and through a steep valley. We reached the corner by parking at Mt. Pleasant church, walking through a gate across from said church and walking across (North and East) a cow pasture to the corner.

**MONUMENT PRESERVATION:** *Describe work done to preserve existing monument.*

GPS coordinates were established on the Rebar. 2 rebar lites and a offset Section corner Rebar were set within sight of it, that could be used to reestablish its location, should it become obliterated. We also located a tree and a I beam style post at a fence angle break, for visual reference. A plastic post with Monroe County Survey marker sign attached facing West was placed on the East side of the rebar.

**THEORY OF LOCATION:** *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*

The Rebar was set online between the Rebar set at the Southwest corner of Section 6 Township 10 North Range 1 West (#512, Wash\_A05) and the Brass disk in Limestone monument found at the Northwest corner of said Section 6 (#10124, TwpCor\_XIX) and at a proportionate measurement split between the record vs measured dimensions between them per the original plat of Township 10 North Range 1 West, which does not show a dimension for the West line of the Southwest quarter of said Section 6, but the acreage for said Southwest quarter on said plat shows 160 acres indicating a projected distance of 40 chains. The original plat does show a distance of 44.89 chains for the length of the west line of the Northwest Quarter. The acreage calculations confirm this also and this also confirms that the post that was originally set in 1815 by William Harris to monument the East quarter corner of Section 1 Township 10 North Range 2 West was later adopted as the West Quarter corner of Section 6 Township 10 North Range 1 West since when they measured back to his original 1815 post from where they placed the final Township corner in 1819, on page 236 of the original notes, they noted measuring back 489 links from the original temp post that had been set 40 chains North of the original East half mile post of said Section 1.

**GEODETTIC COORDINATES:** *Northing:1487615.0' Easting:3096697.7'*

### BASIS OF GEODETTIC COORDINATES:

The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83\_NO\_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover and/or with a Sokkia Set 510 Total Station radially from points located with GPS. Distances obtained with GPS have not been adjusted to ground. To adjust grid distances to ground distances multiply them by a scale factor of 1.000041933.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 6 Township 10 North Range 1 West by Michael E. Sheppard of the Monroe County Surveyor's Office.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 3 of 4

# MONUMENT RECORD

Corner ID: **Wash\_A03**

**Quarter Corner**

Section 6- T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana


Section 1  
T10N-R02W

Section 6  
T10N-R01W

## CERTIFICATIONS:



*Michael E. Sheppard*

Date: 10/28/2025

Michael E. Sheppard

State of Indiana

Professional Surveyor

No. 20100021



*Trohn Enright-Randolph*

Date: 10/28/2025

Trohn Enright-Randolph

Monroe County Surveyor



*Donna B. B. B.*

Accepted by the Monroe County  
Surveyor Review Board on

10/28/25



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • [surveyoroffice@co.monroe.in.us](mailto:surveyoroffice@co.monroe.in.us)

Page 4 of 4